Anniversary

MITSUBISHI ELECTRIC

Changes for the Better

FACTORY AUTOMATION

e-F@ctory

Graphic Operation Terminal
GOT2000 Series Wide Model

NEW GOT

12.1 inch widescreen

12.1 inch type debut

GOT2000 *Wide*

Graphic Operation Terminal

High resolution. Widen your experience.

The 12.1 inch WXGA widescreen display and
enhanced specifications improve your system design.

MITSUBISHI ELECTRIC

Wide model has a large display area!

- Large amounts of information in the wide display area
- Stylish and compact model with narrow bezel
- Smart silver, cool black

219 mm (8.62 inch)

299 mm (11.77 inch)

GOT2000 *Wide*

Actual size

GOT2000

NEW

GT25 wide model

12.1" widescreen

GT2512-WXTSD

Smart silver

GT2512-WXTBD

Cool black

WXGA 1280 x 800	TFT 65536 colors	DC power 24 V DC
Ethernet 2 ports		RS-232
RS-422/485		CC-Link IE Field Basic
Wireless LAN communication unit interface*		Sound output interface
Memory for storage (ROM) 32 MB		Memory for operation (RAM) 128 MB

* A wireless LAN communication unit is required separately.
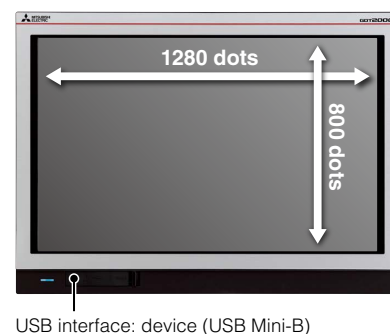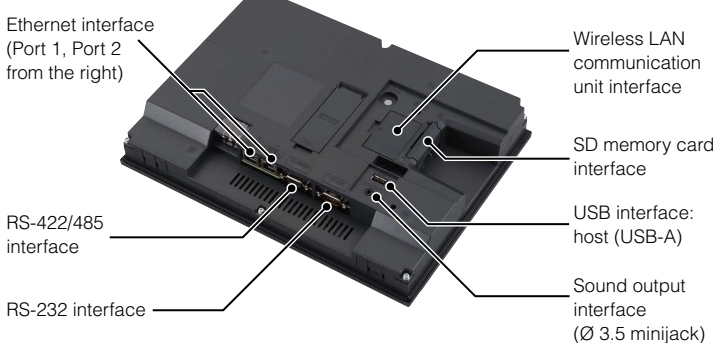
■ Specifications

GOTs

Item	Specifications
	GT2512-WXTBD / GT2512-WXTSD
Display	12.1" widescreen, TFT color LCD, 65536 colors
Resolution	WXGA 1280 x 800 dots
Backlight	White LED
User memory	Memory for storage (ROM): 32 MB Memory for operation (RAM): 128 MB
Interface	Ethernet (2 ports), RS-232, RS-422/485, USB host (USB-A), USB device (USB Mini-B), sound output, SD memory card interface, wireless LAN communication unit interface*1
External dimensions	299(11.77) (W) x 219(8.62) (H) x 48(1.89) (D) mm(inch)
Panel cut dimensions	290.5(11.44) (W) x 210.5(8.29) (H) mm(inch)
Weight	1.7(3.7) kg(lb) (excluding a fitting)
Compatible software package	GT Works3 Version1.250L or later

*1 A wireless LAN communication unit is required separately.

For the details of wide models,
please refer to the Graphic Operation Terminal
GOT2000 Series Wide Model catalog
(L(NA)08461ENG).

Various interfaces

Ethernet interface
(Port 1, Port 2
from the right)

RS-422/485
interface

RS-232 interface

Wireless LAN
communication
unit interface

SD memory card
interface

USB interface:
host (USB-A)

Sound output
interface
(Ø 3.5 minijack)

1280 dots

800 dots

USB interface: device (USB Mini-B)

■ Product list

GOTs

Classification	Model	Screen size	Display section Display color	Panel color	Power
GT25 wide model	GT2512-WXTBD	12.1" WXGA (1280 x 800 dots)	TFT color 65536 colors	Black	24 V DC
	GT2512-WXTSD			Silver*1	

*1 The lower part of the panel including the USB environmental protection cover is black.

Options

Classification	Model	Specifications
Protective sheet	GT25-12WPSGC	For 12.1" wide models	• Antiglare type • Without a hole for the USB environmental protection cover*1 • A set of 5 sheets
	GT25-12WPSCC		• Clear type • Without a hole for the USB environmental protection cover*1 • A set of 5 sheets
Protective cover for oil*2	GT21-12WPCO	For 12.1" wide models	

*1 The protective sheet is shaped not to cover the USB environmental protection cover.
*2 Check if the protective cover for oil can be used in the actual environment before use. When using the cover, the front USB interface cannot be used.

⚠ **Precautions for safe use**
To use the products given in this publication properly, always read the relevant manuals before beginning operation.

Trademarks and registered trademarks
All product and company names used herein are either trademarks or registered trademarks of their respective owners.

The release date varies depending on the product and your region. For details, please contact your local sales office.

The actual color may differ slightly from the pictures in this catalog.
The actual display may differ from what are shown on GOT screen images.

MITSUBISHI ELECTRIC CORPORATION
HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN
NAGOYA WORKS: 1-14, YADA-MINAMI 5, HIGASHI-KU, NAGOYA, JAPAN

New publication, effective Feb. 2021.
L(NA)08770ENG-A 2102(IP)
Specifications are subject to change without notice.