


ROLLER BLIND FITTING INSTALLATION GUIDE

CLASSIC HEADRAIL - CHAIN CONTROL

The installation of this product should be conducted by someone competent in DIY. Please read the instructions before installing or operating this product. If in doubt, consult a professional. Please take care when unpacking your blind, do not use a knife or any sharp object.

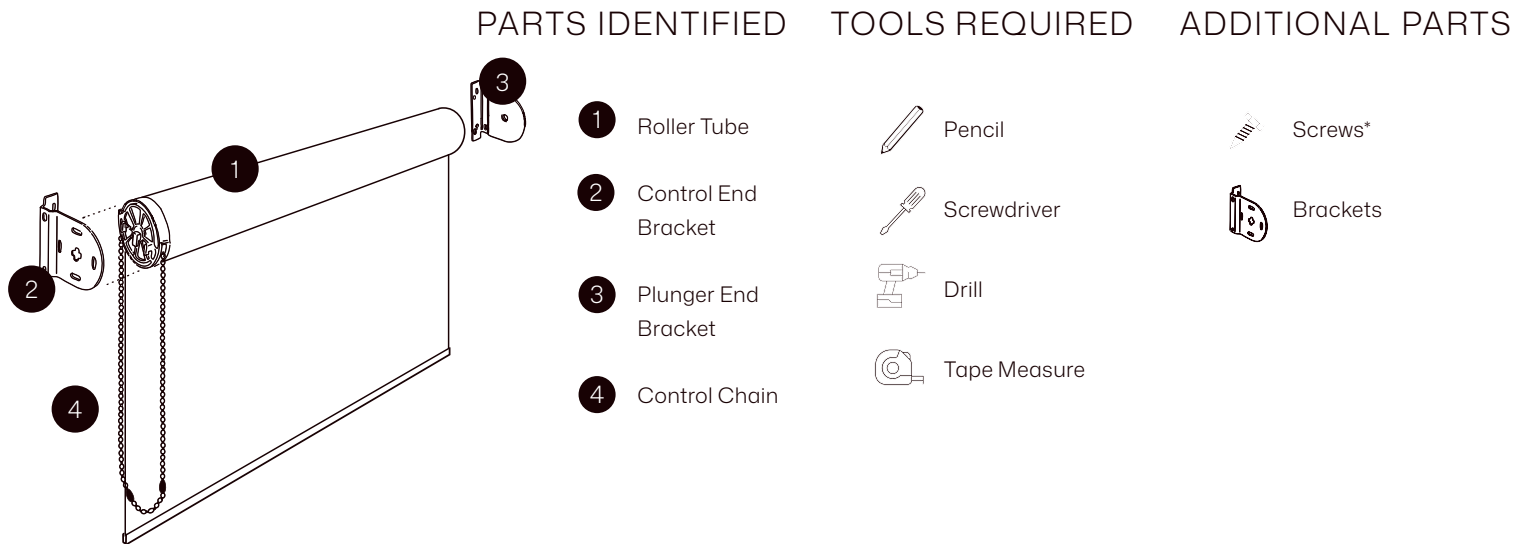


* Before you start fitting your blind make sure the screws are suitable for the surface you are fitting into. Some surfaces will require wall plugs and different screws to the ones we provide.

FITTING INSTRUCTIONS

1. MEASURE

Connect brackets to roller tube.


Use a pencil to mark the outside of the brackets.



2. FIX BRACKETS

Position just the brackets and mark the screw holes.


Drill holes and fix brackets.



3. PLUNGE AND 'CLICK'

Push the plunger end into the bracket until it suppresses.


Gently guide the control end into the bracket until it clicks.



4. FIX THE P-CLIP

Secure chain inside of P-Clip and screw into the wall.

Ensure the chain is fully taut.

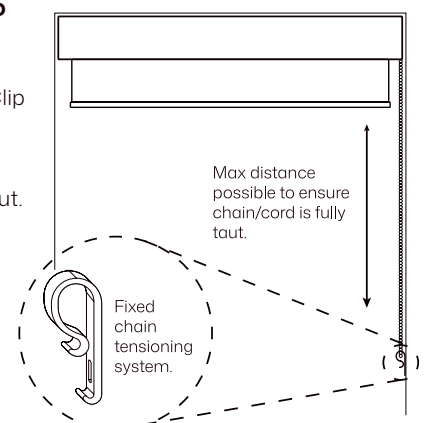


GRAHAM & BROWN

OPERATING YOUR BLIND

Pull the chain to raise and lower your blind.


Do not continue pulling when the blind is fully retracted as you will damage it.

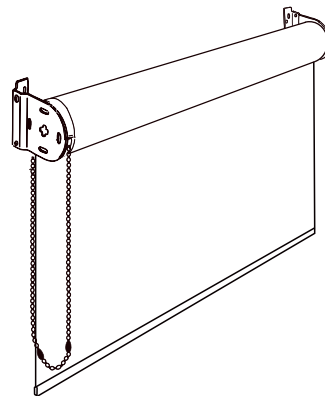

REMOVING THE BLIND

Push towards the plunger end.

Gently slide blind out of the brackets.

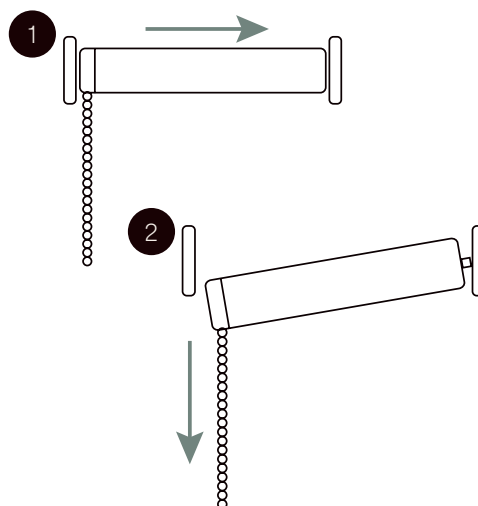

CLEANING INSTRUCTIONS

Use a dry lint free cloth to wipe over the fabric of the blind.


WARNING

Young children can be strangled by loops in pull cords, tapes and inner cords that operate the product.

To avoid strangulation and entanglement, keep cords out of reach of young children.

Cords may become wrapped around a child's neck. Move beds, cots and furniture away from window covering cords.

Do not tie cords together. Make sure cords do not twist and create a loop.



GRAHAM & BROWN